


DW SERIES

DW551LR5


55" 4000 nits Clean Back Digital Signage
Android and SDM dual system




SUSTAINED
HIGH BRIGHTNESS




INTEL® SMART
DISPLAY MODULE
COMPATIBLE



CEILING
SUSPENDED



FLOOR
MOUNTED



BUILT-IN
MEDIA PLAYER

Android is a trademark of Google LLC.
The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.

Intel is a trademark of Intel Corporation or its subsidiaries.
Intel® SDM not included.

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.


DynaScan

SPECIFICATION


| | | |
|--|---|--|
| MODEL | DW551LR5 | |
| PANEL | LCD Panel Size | 54.64" |
| | Native Resolution | 1920 x 1080 |
| | Brightness | 4000 nits |
| | Color Depth | 8 bits |
| | Contrast Ratio | 3000 : 1 |
| | Response Time (Typ.) | 9 ms |
| | Viewing Angle | 178° / 178° |
| | Light Lifetime (Typ.) | 100,000 hrs |
| Polarized Sunglasses Support | Yes | |
| POWER | Power Supply | Internal |
| | Rated Voltage | 100-240V ~ 50/60HZ |
| | Power Consumption (Typ./ Max) | 130 W / 260 W |
| | Power Saving Mode | < 1 W |
| MECHANICAL SPECS | Bezel Width (T/B/L/R) | 11.0 / 11.0 / 11.0 / 11.0 mm |
| | Cabinet Color | Black |
| | Monitor Dimension (LxHxD) | 1240.4 x 710.7 x 74.3 mm |
| | Monitor Weight | 27 kg |
| | Orientation | Portrait / Landscape / Portrait Flip |
| USER INTERFACE | Language | English |
| | Support SNMP (Up to V3.0) | Yes |
| | Image Retention Protection | Yes |
| | Auto Orientation Sensor | Yes |
| | Ambient Light Sensor | Yes |
| | Power On/Off Scheduling | Yes |
| OSD Menu Rotation | Yes | |
| EXPANSION SLOT FOR INTEL® SDM <small>SDM S/L module not included in the product.</small> | SDM Slot | SDM-S (support with DynaScan extended board) & SDM-L Compatible |
| | Power Support | Up to 45 W |
| INPUT | HDMI 2.1 (HDCP 2.3) | x2 (1080p recommended) |
| | USB 2.0 | x2 |
| OUTPUT | Audio | x1 |
| EXTERNAL CONTROL | RS-232 | In x1 |
| | RJ-45 | x1(LAN) |
| | ETK Port (Thermal) | x1 |
| | ESK Port (IR, Ambient) | x1 |
| ENVIRONMENT | Operating Temperature | 0°~ 45° C |
| | Storage Temperature | -20°~60° C |
| | Humidity | 10% ~ 80% RH Non-condensing |
| INTERNAL PLAYER | Operating System | Android 11.0 |
| | Processor | Quad-core A53 |
| | Clock Speed | 1.5GHz |
| | Main Memory Interface | DDR4, 2GB |
| | Graphics | Mali G52 |
| | Storage | Internal: 8GB eMMC Flash |
| | Multimedia | 4K video decoders, 30/60fps H.264 /VP9 10bit, MPEG-1/2/4 802.11a/b/g/n/ac (2T2R) |
| Wi-Fi Specification | 802.11a/b/g/n/ac (2T2R) | |
| CERTIFICATION | CE / CB / FCC / ETL / RCM / RoHS / PSE / VCCI | |

DIMENSIONS

Unit: mm [inch]

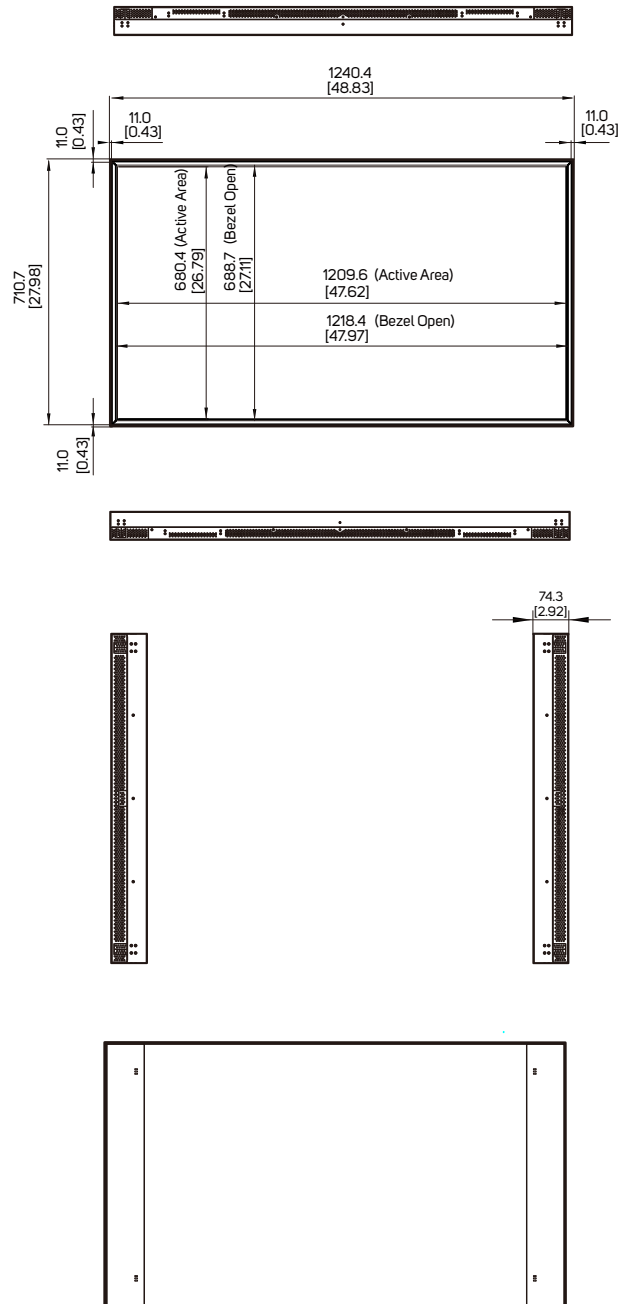

INTERFACE

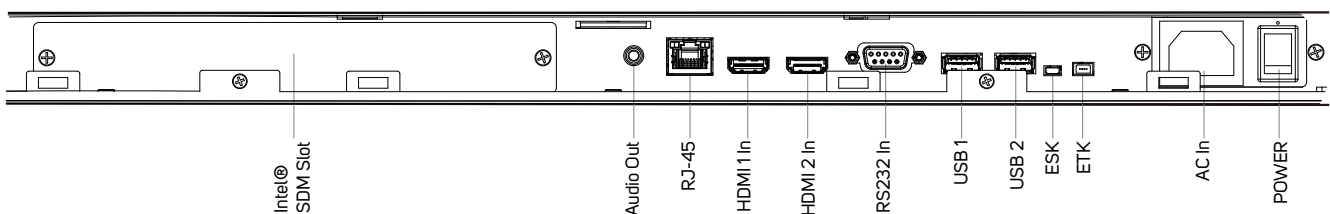

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan