


newline

OPS PC



Kompatibel zu
allen Newline
Displays

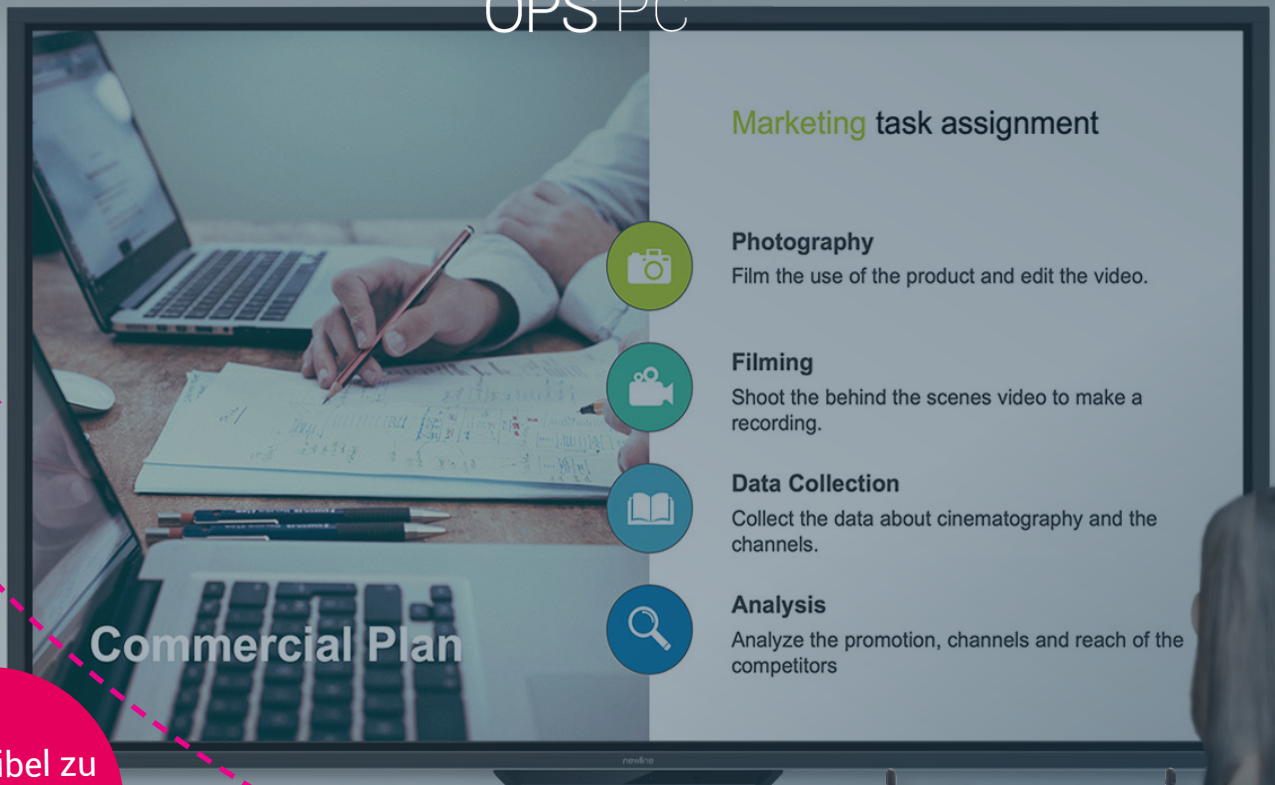


Powered
by Intel



Unterstützt
HDMI 2.0



USB-C



Dual Channel
Memory



OneKey
Recovery



Unterstützt
TPM 2.0

LEISTUNGSSTARKES WINDOWS NAHTLOS INTEGRIERT

Newline OPS-PC ist ein Bordcomputer für Newline-Displays, der sich nahtlos über den OPS-Slot auf der Rückseite des Panels integrieren lässt. Wenn Sie Ihren Newline-Bildschirm einschalten, wird der OPS-PC automatisch mit eingeschaltet. Keine sichtbaren Kabel, kein Anschluss weiterer Windows-Geräte notwendig. Der Newline OPS-PC ist in einer Reihe von Varianten mit unterschiedlichen Spezifikationen erhältlich. Alle Modelle verfügen über OneKey Recovery zur schnellen Wiederherstellung Ihres PCs im Falle eines Systemausfalls. Newline OPS-PC wird mit Intel Prozessoren betrieben und unterstützt 4K/UHD bei 60 Hz für eine brillante Bildqualität. Ein absolutes Muss für jede Newline-Lösung!

OPS PC

Modell	WB5A820W	WB5A820J	WB7A120J
Processor	Intel® Comet lake-U	Intel® Comet lake-U	Intel® Comet lake-U
SOC	Intel® Core™ i5-10210U	Intel® Core™ i5-10210U	Intel® Core™ i7-10510U
Arbeitsspeicher	2 x 4 GB DDR4	2 x 4 GB DDR4	2 x 8 GB DDR4
Performance	6 M Cache, up to 4,20 GHz	6 M Cache, up to 4,20 GHz	8 M Cache, up to 4,90 GHz
Speicher	256 GB SSD	256 GB SSD	256 GB SSD
Grafikkarte	Intel® UHD Graphics	Intel® UHD Graphics	Intel® UHD Graphics
Wireless	Intel AC3165/8265 (2.4G/5G/BT 4.2)	Intel AC3165/8265 (2.4G/5G/BT 4.2)	Intel AC3165/8265 (2.4G/5G/BT 4.2)
WIFI/BT	802.11ac/BT4.2	802.11ac/BT4.2	802.11ac/BT4.2
Netzwerk	Integrated 10/100/1000 M Adaption	Integrated 10/100/1000 M Adaption	Integrated 10/100/1000 M Adaption
Lan	Intel 1000M	Intel 1000M	Intel 1000M
Audio	Realtek ALC662 HD Audio IC	Realtek ALC662 HD Audio IC	Realtek ALC662 HD Audio IC
Anschlüsse Vorderseite	USB-A 3.0 x 2 USB-A 2.0 x 2 RJ45 10/100/1000 M x 1 HDMI 1.4 out (4K@30 Hz) x 1 Jack 3,5 mm Line out x 1 Jack 3,5 mm Mic in x 1 WIFI/BT ANT x 2 Power button x 1 Power LED x 1 SSD LED x 1 Kensington lock slot x 1 USB-C x 1	USB-A 3.0 x 2 USB-A 2.0 x 2 RJ45 10/100/1000 M x 1 HDMI 1.4 out (4K@30 Hz) x 1 Jack 3,5 mm Line out x 1 Jack 3,5 mm Mic in x 1 WIFI/BT ANT x 2 Power button x 1 Power LED x 1 SSD LED x 1 Kensington lock slot x 1 USB-C x 1	USB-A 3.0 x 2 USB-A 2.0 x 2 RJ45 10/100/1000 M x 1 HDMI 1.4 out (4K@30 Hz) x 1 Jack 3,5 mm Line out x 1 Jack 3,5 mm Mic in x 1 WIFI/BT ANT x 2 Power button x 1 Power LED x 1 SSD LED x 1 Kensington lock slot x 1 USB-C x 1
JAE 80-Pin	HDMI 2.0 (4K@60 Hz)	HDMI 2.0 (4K@60 Hz)	HDMI 2.0 (4K@60 Hz)
Stromspeisung	12-19 V DC IN	12-19 V DC IN	12-19 V DC IN
TPM	TPM 2.0	TPM 2.0	TPM 2.0
Watchdog	Support	Support	Support
Material	Metal	Metal	Metal
Abmessungen	180 x 119 x 30 mm	180 x 119 x 30 mm	180 x 119 x 30 mm
Temperaturen	Operating 5°C~45°C Storage -10°C~50°C	Operating 5°C~45°C Storage -10°C~50°C	Operating 5°C~45°C Storage -10°C~50°C
Relative Luftfeuchtigkeit	5%~95% (non-condensing)	5%~95% (non-condensing)	5%~95% (non-condensing)
Nettogewicht	1 Kg	1 Kg	1 Kg
Windows	Windows 10 Pro Preinstalled (not activated)	Windows 10 Pro License included	Windows 10 Pro License included

newline

HEAD OFFICE EMEA

Ronda de Poniente, 16,
Bajo E, 28760, Tres Cantos,
Madrid, Spain
TEL: +34 910528834

BRANCH OFFICE POLAND

Aleje Jerozolimskie 200,
pokój 322, 02-486,
Warszawa, Poland
TEL: +48 533379973

BRANCH OFFICE GERMANY

Am Münster 36,
37154 Northeim
Germany
TEL: +49 55515889580

SHOWROOM/OFFICE ITALY

Via Giuseppe Giusti 10,
20068 Peschiera Borromeo - MI
Italy
TEL: +39 3351295904

newline-interactive.com/eu/ / info_eu@newline-interactive.com

Contact Support: support_eu@newline-interactive.com / Technical Support Hotline: +34 91 804 31 79