


Quick Usage

Before using, you can refer to [Installation & Connection](#) to configure. After the deployment is complete, you can refer to [Quick Usage](#) to learn about general functions.

For the video of this chapter, please refer to [Quick Start Video](#).

Hardware Interface


MeetingBoard 65/86

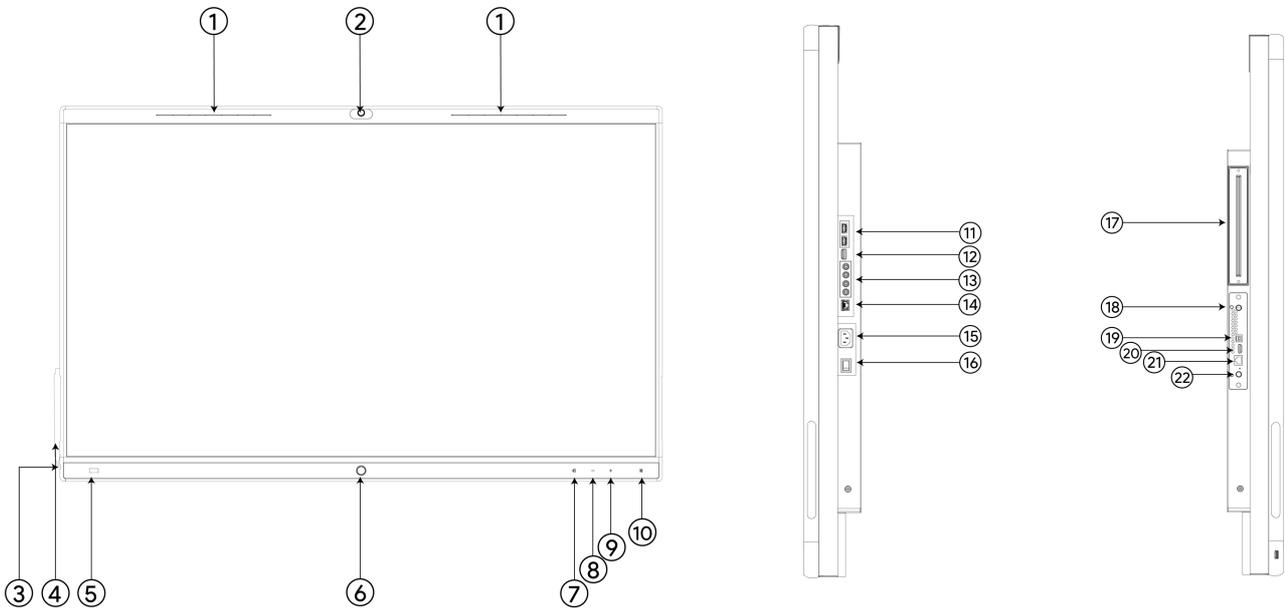

No.	Port Name	Description
1	Microphone/LED Indicator	The status of audio input/different LED indicator means different states of the MeetingBoard
2	Built-in the Camera	Built-in the Camera
3	USB-A 2.0 Port	- Connect to Yealink Wireless Presentation Pod (WPP20/WPP30) for screen sharing. - Connect a USB flash drive.
4	Stylus	Stylus
5	Human Motion Sensor	It will automatically wake up the screen when it detects someone approaching.

6	Home key	Return to the home page/wake screen
7	Signal Source Switching Key	Switch between Android/HDMI/Windows
8	Volume - Key	Volume - Key
9	Volume + Key	Volume + Key
10	NFC	Coming soon
11	USB-A 3.0 Port	- Connect to Yealink Wireless Presentation Pod (WPP20/WPP30) for screen sharing. - Connect a USB flash drive.
12	HDMI out Port	Connect to a projector/external display
13	RCA Input/Output Port	Third-party Audio Input/Output Port
14	Internet Port	Connect to network
15	Power Input	Connect to Power Supply
16	Power Key	- Main Circuit Breaker - "I": Power on - "O": Power off
17	Windows OPS slot	For more information, please refer to MCore OPS .
18	Android OPS	Android OPS
19	USB-B Touch Output Port	When connecting to HDMI in cable simultaneously, it can reverse control the device.
20	HDMI in Port	- Connect to HDMI in cable for wired screen sharing; - Connect to the USB-B cable simultaneously to reverse control .
21	VCH Port	Connect Yealink accessories such as CTP, VCH, etc.
22	Reset Key	Press and hold for 5 seconds to restore factory settings

MeetingBoard Pro

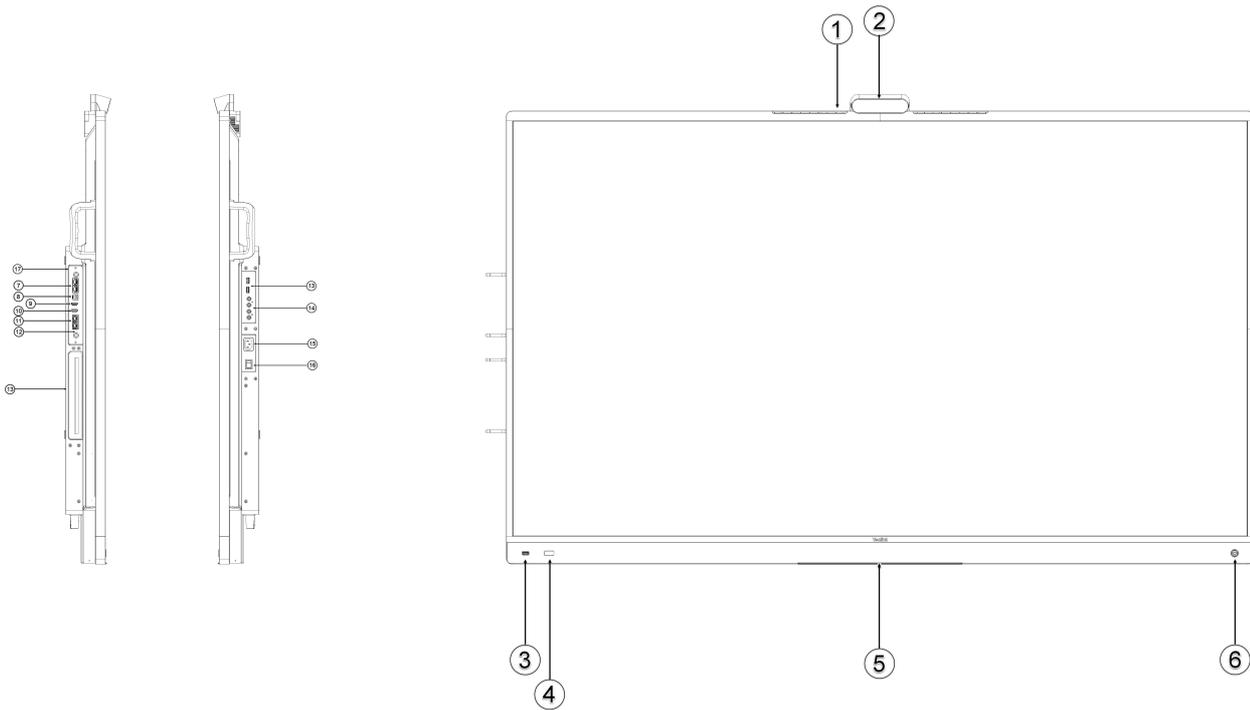

No.	Port Name	Description
1	Microphone Mute Status Indicator Led Light	Indicate muted status during a meeting
2	Built-in Camera	Built-in Camera
3	USB-A 2.0 Port	- Connect to Yealink Wireless Presentation Pod for screen sharing. - Connect a USB flash drive.
4	Human Motion Sensor	It will automatically wake up the screen when it detects someone approaching.
5	Stylus Pen Holder	Stylus holder
6	Power Button	Bring up the power menu/Wake up the device
7	VCH Port	Connect Yealink accessories such as CTP25, VCH51, etc.
8	USB-B Touch Output Port	Reverse control is available when both USB-B and HDMI are connected.
9	HDMI in Port	- Connect to HDMI in cable for wired screen sharing; - Connect to the USB-B cable simultaneously to reverse control .
10	HDMI out Port	Connect to a projector/external display
11	Lan Port 1/ Lan Port 2	- Connect to network. - LAN port 1 can provide network access to both Android and Windows OPS simultaneously, but LAN port 2 can only provide network access to Android.

12	Reset Key	Press and hold for 5 seconds to restore factory settings
13	Windows OPS slot	For more information, please refer to MCore OPS
14	RCA Input/Output Port	Third-party Audio Input/Output Port
15	Power Input	Connect to Power Supply
16	Power Key	Main Circuit Breaker - "I": Power on - "O": Power off
17	Android OPS	Android OPS

LED Indicator Introduction

MeetingBoard 65/86

LED Status	Description
Off	- off - Not in a call
Rolling green light from the inside out	- Booting - Powering off
Flash green slowly (1 time/3 seconds)	Sleep mode
Rolling green light from left to right	- Upgrading - Factory reset
Flash red (1 times and off)	Android OPS module is pulled out
Flash red (1 times and/ 0.5s)	Pairing with other accessories


MeetingBoard Pro

LED Status	Description
Off	- Unmuted - Not in a call
Steady red light	Muted

Interface Introduction



No.	Description
1	The local time.
2	The meeting room (account) name.
3	If you've configured a Calling Plans for your Teams account, it displays the account's work number.
4	Start an instant meeting.
5	If you've configured a Calling Plans for your Teams account, you can join a meeting by dialing a phone number.
6	Whiteboard.
7	Start/stop sharing.
8	Join with a meeting ID.
9	Configure the video conferencing device.
10	Scheduled meetings.
11	Join an invited meeting.
12	Click the sidebar to enter the shortcut tools. Please refer to the figure below for details.

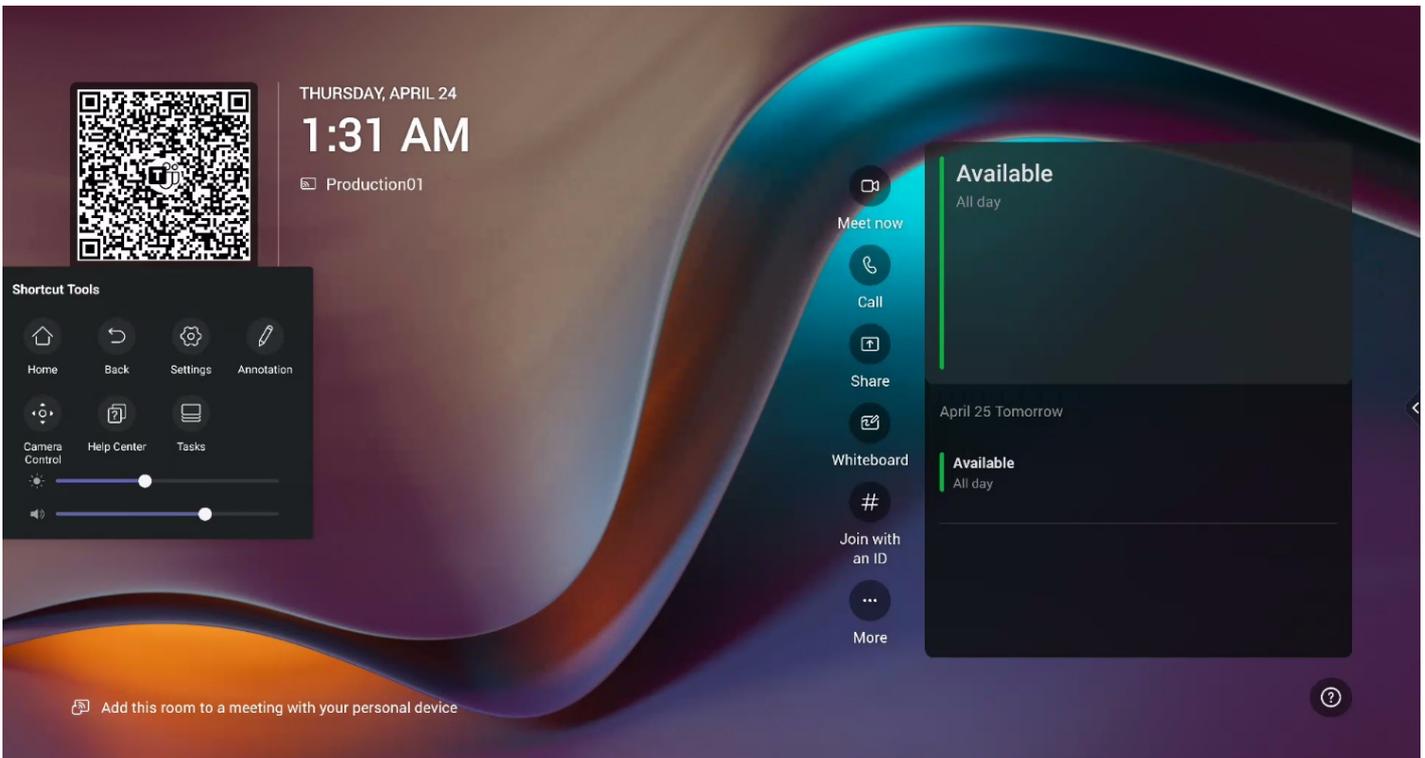


No.	Description
1	<p>Home: Return to homepage.</p> <p>Task: Quickly switch or clear the currently running tasks of MeetingBoard.</p> <p>Power: Use this button to sleep, restart, and shut down.</p> <p>Settings: View device IP, change device settings, etc. For example, display, camera, audio, network, etc. can be configured.</p> <p>Annotation: In any interface on the MeetingBoard 65/86, you can add annotations to the content of the page.</p> <p>Camera Control: Adjust the camera manually, or use camera AI features such as Auto Framing, etc.</p> <p>Help Center: Cover guides and FAQs to help you get started quickly and master the use of the MeetingBoard.</p>
2	Adjust MeetingBoard brightness.
3	Adjust the MeetingBoard speaker volume.

Teams Rooms Meeting Interface



No.	Description
1	Display the remote video screen.
2	Meeting controls toolbar.
3	Display the local video screen.

Whiteboard Interface

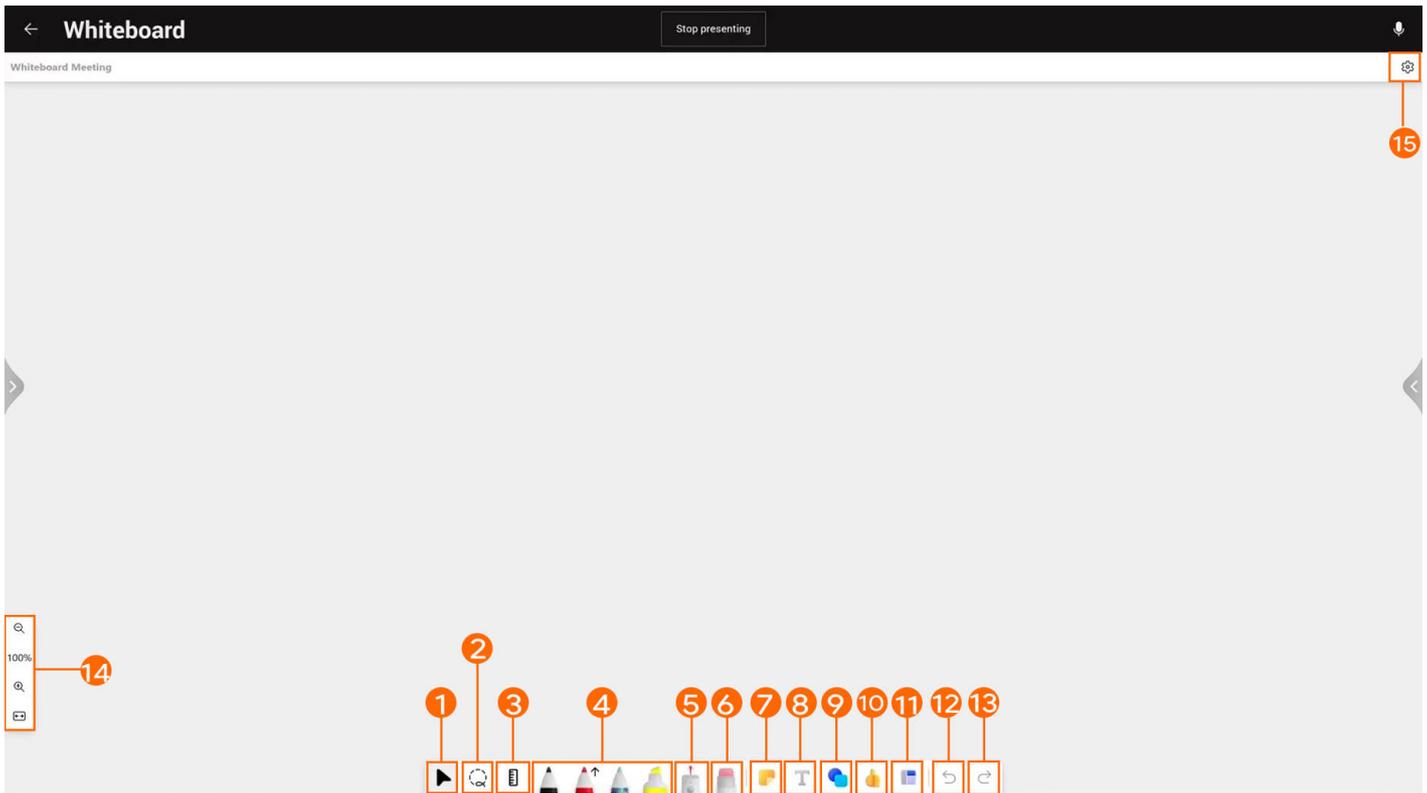

No.	Description
1	Move/zoom in/out of the whiteboard.
2	Circle Contents
3	Ruler
4	Brushes/highlighters
5	Laser point
6	Ease
7	Sticky notes
8	Text
9	Shape
10	Emojis
11	Template
12	Undo
13	Redo
14	Zoom the whiteboard
15	Whiteboard setting

General Feature

When the administrator completes the [Quick Setup](#), you can use the screen normally.

Description	Related Document
Start an instant meeting	Instant Meeting
Join a meeting	Join Meeting
Invite a member to the meeting	Invite Participant
Use whiteboard	Whiteboard
Starting sharing via the Wireless Presentation Pod	Share Content via Wireless Presentation Pod
Starting sharing via VCH51	Share Content via VCH51
Camera control	Camera Control